







Peak AC Flex Light

INSTALLATION INSTRUCTIONS

Part#: ACC120KK-LLLL15-16-XX

PARTS/TOOLS NEEDED:

					
Flexible Light	Mounting Channel/Clips (purchased separately)	Jumper Cable (optional)	Power Drill (not provided)	Butt Splice Connectors (not provided)	#4 Flat Head Screws (not provided)

IMPORTANT SAFETY INSTRUCTIONS. READ, FOLLOW AND SAVE ALL SAFETY INSTRUCTIONS

Electrical ratings:

120V AC | 0.03A/FT | 3.1W/FT | Max installation - 164' (50M)

Mounting considerations and instructions for proper use:

- Do not cover this product as the covering may cause the flexible light to overheat and melt or ignite.
- Do not operate with the flexible light tightly coiled.
- Do not puncture, cut, shorten, or splice the flexible lighting.
- Do not use if there is any damage to the light or cord insulation. Inspect periodically.
- Do not submerge flexible light in liquids, or use the product in the vicinity of standing water or other liquids.
- Secure this flexible light using only the hangers or clips provided. Do not secure this product or its cord with staples, nails, or like means that may damage the insulation or permanently attach to the building structure.
- Do not subject flexible lighting to continuous flexing.
- The flexible light cannot be field cut. Any field modification of the light will void the warranty.

WARNING:

- When using outdoor portable lighting products, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following:
- Do not route the cord or flexible lighting through walls, doors, windows or any like part of the building
- Ground Fault Circuit Interrupter (GFCI) protection should be provided on the circuits or outlet to be used for the outdoor installation of flexible lighting product. Receptacles are available having built-in GFCI protection for this measure of safety.

1. Determine the installation location and install the track by either taping or screwing in place. The channel will come with pre-drilled holes every 12".

If using mounting clips, it is recommended that clips be installed every 12".

Install the light in the track by gently pressing it in.



Mounting Channel




Mounting Clips



3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
DOC #: 710-00221 · Rev A · 05/15/23

2. Wire the light to the buildings incoming AC power.

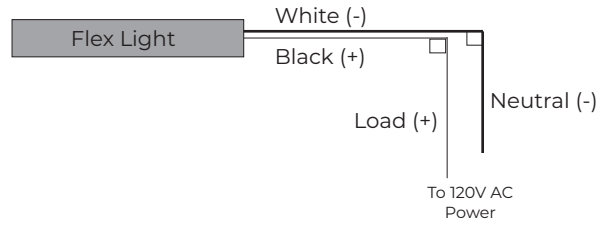

3. Please review the considerations below to ensure a successful installation.

