






Hardtop Light

Part#: 69237

INSTALLATION INSTRUCTIONS

PARTS/TOOLS NEEDED:

				
Hardtop Light	Two #8 Pan Head Screws	Butt Splice Connectors (not provided)	Power Drill (not provided)	Hole Saw Bit

IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- It is recommended that fuse protection be added to the positive (+) input.


1. Remove bezel and drill a hole in the mounting surface with a 3-5/8" hole saw.

2. Wire the light following the wiring diagrams below.


If using a two wire version a standard switch can be used. The light should be turned off and on to cycle through the colors.

If the light is off for more than 30 seconds it will restart the cycle.

If using a three wire version, a three position switch will be required.

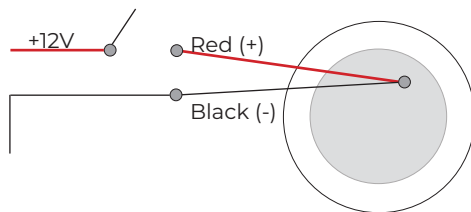

Single Color

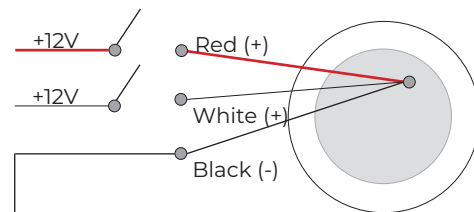

Two Color

3. Install screws into flange and tighten to mounting surface. Turn bezel clockwise to replace.



3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
Rev B · 07/20/16