

4.5" Radiance™ LED Overhead Light



Features


- Available in 3000K, 3500K or 4000K color temperatures
- Air flow vents added to dissipate heat
- Polycarbonate lens provides the appearance of frosted glass while offering maximum light output and a soft diffused glow
- Available with or without an integral on/off switch
- Wiring moved to center of the light to simplify installation
- MacAdam Ellipse color control technology: color difference between fixtures guaranteed to be undetectable to the human eye.

Product Details

Mounting	Surface	Recessed
Lens Material	Polycarbonate	
Voltage	10-14V DC	
Wattage	Std: 3.8W High: 3.9W	3.8W
Current	Std: 0.28A High: 0.29A	0.32A
Lumens	Std: 258LM High: 339LM	250LM
Color Temp.	3000K, 3500K or 4000K	3000K or 4000K
Cutout	N/A	3.5"

Specification Guide

Sample Part #: 69253CUSM-03-0030

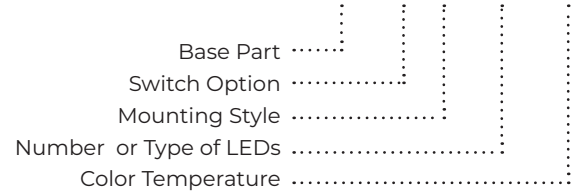

4.5" Surface Mount Radiance

Base Part #	Switch Option	Mounting Style	Type of LEDs	Color Temp.
69253C	U - Unswitched S - Switched	SM - Surface Mount	03 - Standard 04 - High	0030 - 3000K 0035 - 3500K 0040 - 4000K

4.5" Recessed Radiance

69240PC	N/A	NS - Screw Mount * Leave blank for spring mount	15 - Standard	3KE - 3000K 4KE - 4000K
---------	-----	--	---------------	----------------------------

