









VersiColor Luna Flex

INSTALLATION INSTRUCTIONS

Part#: RNLL12RW or RNLL24RW

PARTS / TOOLS NEEDED:

							
Flex Light (varies)	RGBW Controller (purchased separately)	UL Approved Power Supply (purchased separately)	Mounting Track (purchased separately)	Wire Clip (purchased separately)	Butt Splices (not provided)	Power Drill (optional)	#4 Screws (Screw mount track only)

Safety Instructions

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.
- For safety purposes, ITC recommends tape light installations be used with a Class 2 power device. For installations without a Class 2 power device, it is highly recommended that appropriate fusing be used, to be determined by tape light length.

Installation Considerations For All Flexible Lighting Products

- Do not bend lighting more than necessary. It should only be bent to a 1" radius. Bending to a tight 90 degree angle could cause damage to the circuit.
- Only bend the LED ribbon in one natural direction, do not try to bend in an unnatural direction such as twisting.


**Installation Considerations For RNLL Flexible Lighting

- Unroll the entire length of Luna (RNLL) before installing.
- Start at the wire lead end and beginning of channel, work the light into the channel going 6" at a time. The light should go into the channel pretty easily by just thumbing it in.
- When pushing the light into the channel, make sure to push towards the wired end. The silicone on the light is flexible and pushing away from the wired end will leave a gap at the end of the run.
- Do not use any roller as that may cause damage to the LED circuit.
- Secure wire/cable at tape light once installed

1. Determine the installation location and install the track by either taping or screwing in place. Install the light in the track by gently rocking it back and forth. Refer to installation tips above to ensure a successful installation.



Adhesive Mount Track

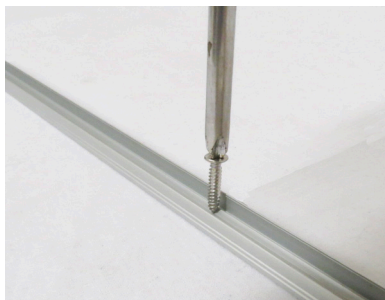


Screw Mount Track




Installing Light

*Lights may not be field cut. Field cutting the light will void the warranty.


2. Installing wire clip: Wire clip must be secured at least 1 inch from wire exit.



Screw wire clip to mounting
surface

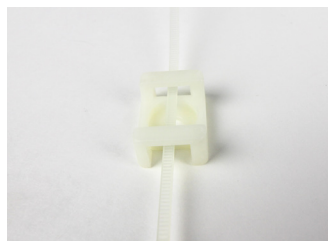

Feed zip tie through the slots

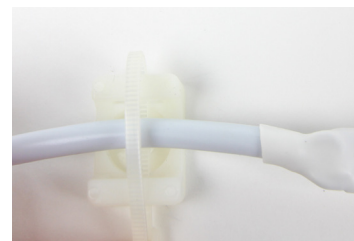

Screw wire to clip using the
zip tie.



3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
DOC #: 710-00045 · Rev D · 04/26/23

3. Follow the wiring diagram below to wire the light to your system.

