


LOOK™ Outer Etched

Integrated LED Backlit Mirror

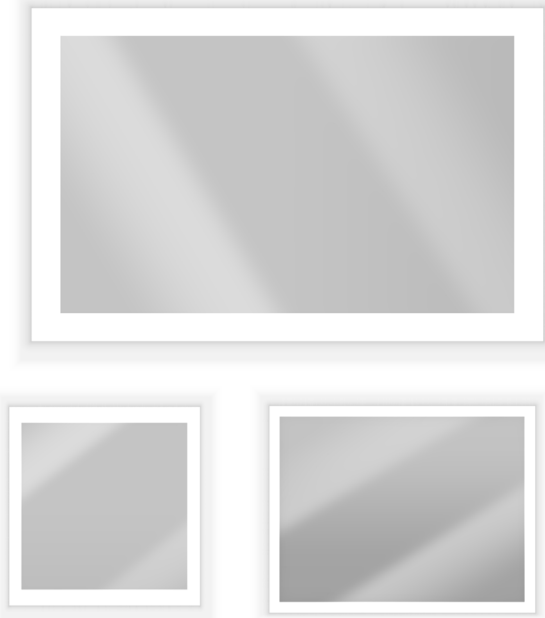


Features

- Improved illumination and reduced shadowing through the use of side lighting
- Mirror and mounting panel is IP44 rated
- Detailed dimensional drawings are available for all mirrors to help in planning the layout of blocking and power supply location.
- Safety PVC membrane on back prevents small pieces from falling off in the event of a mirror breakage
- Lead free silver backing exceeds ISO 9227:2012, 120 hour corrosion testing
- Can be mounted either portrait or landscape orientation
- Back box power supply provides flexible installation that meets stringent building codes
- Power supply junction box can be screwed into the pre-installed brackets on the mirror or into contractor supplied blocking

Specification Guide

Sample Part #: 69455.ELS.3226.30K.RMT

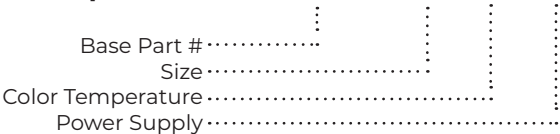

| Base Part # | Size | Color Temp. | Power Supply |
|-------------|--|---------------------------|---------------------------|
| 69455.ELS | 3226 - 32"W x 26"H 2436 - 24"W x 36"H 3927 - 39"W x 27"H 1844 - 18"W x 44"H 2448 - 24"W x 48"H 5442 - 54"W x 42"H 5626 - 56"W x 26"H 6642 - 66"W x 42"H | 30 - 3000K 40 - 4000K* | RMT - Remote Power Supply |

* Non-stock option, subject to a 50 piece minimum order quantity, contact sales for availability.



Product Details

69455.ELS.3226.30K.RMT



| | |
|------------|-----------------------------|
| Dimensions | 31.5"W x 25.6"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 23W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.23A @ 120V AC |
| Lumens | 2650 LM @ 120V AC |
| Kelvin | 3000K or 4000K ² |
| CRI | > 90 |

69455.ELS.2436.30K.RMT



| | |
|------------|-----------------------------|
| Dimensions | 23.6"W x 35.4"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 24W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.24A @ 120V AC |
| Lumens | 2750 LM @ 120V AC |
| Kelvin | 3000K or 4000K ² |
| CRI | > 90 |

69455.ELS.3927.30K.RMT



| | |
|------------|-----------------------------|
| Dimensions | 39.4"W x 27.6"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 26W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.26A @ 120V AC |
| Lumens | 3025 LM @ 120V AC |
| Kelvin | 3000K or 4000K ² |
| CRI | > 90 |

69455.ELS.1844.30K.RMT



| | |
|------------|------------------------------|
| Dimensions | 18.1"W x 44"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 25W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.25A @ 120V AC |
| Lumens | 2850 LM @ 120V AC |
| Kelvin | 3000K or 4000K ^{**} |
| CRI | > 90 |

69455.ELS.2448.30K.RMT



| | |
|------------|-----------------------------|
| Dimensions | 23.6"W x 47.2"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 29W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.29A @ 120V AC |
| Lumens | 3300 LM @ 120V AC |
| Kelvin | 3000K or 4000K ² |
| CRI | > 90 |

69455.ELS.5626.30K.RMT



| | |
|------------|-----------------------------|
| Dimensions | 55.1"W x 25.6"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 33W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.33A @ 120V AC |
| Lumens | 3750 LM @ 120V AC |
| Kelvin | 3000K or 4000K ² |
| CRI | > 90 |



69455.ELS.5442.30K.RMT



69455.ELS.6642.30K.RMT




| | |
|------------|-----------------------------|
| Dimensions | 53.1"W x 41.3"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 38W @120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.38A @ 120V AC |
| Lumens | 4400 LM @ 120V AC |
| Kelvin | 3000K or 4000K ² |
| CRI | > 90 |

| | |
|------------|-----------------------|
| Dimensions | 65"W x 41.3"H x 1.8"D |
| Housing | Anodized Aluminum |
| Lens | Glass |
| Wattage | 43W @ 120V AC |
| Voltage | 120 - 277V AC |
| Current | 0.43A @120V AC |
| Lumens | 4950 lm @ 120V AC |
| Kelvin | 3000K or 4000K** |
| CRI | > 90 |

Power Box Specifications

*Ordered Separately



| | | |
|--------------|------------------------|----------------------------|
| Part Number | 690010.121 0-10V DC | 690010.143 Line Voltage |
| Dimensions | 13"L x 1.25"W x 1.7"D | |
| Housing | Aluminum | |
| Wattage | 96W | |
| Voltage | 120 - 277V AC | |
| Current | Max 4A | |
| Power Factor | 0.94 @ 120V AC | |
| Frequency | 50 - 60Hz | |

Line Voltage Approved Dimmers

| Leviton | | Lutron | |
|-----------|-------|-------------|-------------|
| VPI06-1LZ | DZ6HD | SCL-153PR | CTCL-153PDH |
| TTI06-1LZ | 6674 | DVCL-153PR | PD-6WCL |
| IPL06 | 6672 | DVWCL-153PH | PD-5NE-WH |

Notes:

1. Lumens per watt based on light source
2. Standard non-stock mirrors subject to 90 day lead time
3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
4. Mirrors must be shipped LTL and cannot be shipped via FedEx or UPS

