

LOOK™ No Etch

Integrated LED Backlit Mirror




Features

- Improved illumination and reduced shadowing through the use of side lighting
- Illumination from the back provides an ambient glow
- Mirror and mounting panel is IP44 rated
- Detailed dimensional drawings are available for all mirrors to help in planning the layout of blocking and power supply location.
- Safety PVC membrane on back prevents small pieces from falling off in the event of a mirror breakage
- Lead free silver backing exceeds ISO 9227:2012, 120 hour corrosion testing
- Can be mounted either portrait or landscape orientation
- Back box power supply provides flexible installation that meets stringent building codes
- Power supply junction box can be screwed into the pre-installed brackets on the mirror or into contractor supplied blocking

Specification Guide

Sample Part #: 694NE1830-30KSO00B

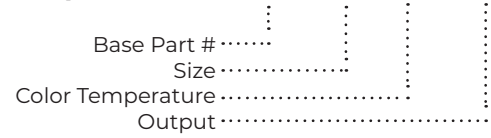

Base Part #	Size	Color Temp.	Output
694NE	1830 - 18"W x 30"L	30 - 3000K 35 - 3500K* 40 - 4000K*	SO00B - Standard HO00B - High*
	2436 - 24"W x 36"L		
	3927 - 39"W x 27"L		
	2442 - 24"W x 42"L		
	1824 - 18"W x 24"L		

* Non-stock option, subject to a 50 piece minimum order quantity, contact sales for availability.



Product Details

694NE1830-KKXX00B



Output	Standard	High
Dimensions	18"W x 30"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	19W	27W
Voltage	120 - 277V AC	
Current	0.19A	0.27A
Lumens	2000 LM	2880 LM
Kelvin	3000K	
CRI	> 90	

694NE2436-KKXX00B



Output	Standard	High
Dimensions	24"W x 36"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	24W	35W
Voltage	120 - 277V AC	
Current	0.24A	0.35A
Lumens	2640 LM	3800 LM
Kelvin	3000K, 3500K ² or 4000K ²	
CRI	> 90	

694NE3927-KKXX00B



Output	Standard	High
Dimensions	39"W x 27"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	26W	37W
Voltage	120 - 277V AC	
Current	0.26A	0.37A
Lumens	2900 LM	4175 LM
Kelvin	3000K, 3500K ² or 4000K ²	
CRI	> 90	

694NE1824-30SO00B



Output	Standard	High
Dimensions	18"W x 24"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	17W	25W
Voltage	120 - 277V AC	
Current	0.17A	0.24A
Lumens	1840 LM	2650 LM
Kelvin	3000K	
CRI	> 90	



694NE2442-KKXX00B



Output	Standard	High
Dimensions	42"W x 24"H x 1.7"D	
Housing	Anodized Aluminum	
Lens	Glass	
Wattage	26W	37W
Voltage	120 - 277V AC	
Current	0.26A	0.37
Lumens	2900 LM	4175 LM
Kelvin	3000K, 3500K ² or 4000K ²	
CRI	> 90	

Power Box Specifications

**Ordered Separately



Part Number	690010.121
Dimensions	13"L x 1.25"W x 1.7"D
Housing	Aluminum
Wattage	96W
Voltage	120 - 277V AC
Current	Max 4A
Power Factor	0.94 @ 120V AC
Frequency	50 - 60Hz
Dimming	0-10V DC

- Notes:**
1. Lumens per watt based on light source
 2. Standard non-stock mirrors subject to 90 day lead time
 3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
 4. Mirrors must be shipped LTL and cannot be shipped via FedEx or UPS

