

LOOK™ Classic

Integrated LED Illuminated Mirror



Features

- Illumination from the back provides an ambient glow
- Safety PVC membrane on back prevents small pieces from falling off in the event of a mirror breakage
- Copper-free backing for greater corrosion and scratch resistance
- Can be mounted either portrait or landscape orientation
- Back box power supply provides flexible installation that meets stringent building codes
- Power supply junction box can be screwed into the pre-installed brackets on the mirror or into contractor supplied blocking
- Upgraded back lighting with optional dimming and color selection features
- Optional anti-fog mat prevents condensation

Product Details

Part #	694NE1830-30SO00B	694NE1824-30SO00B	694NE2436-30SO00B	694NE3927-30SO00B
Dimensions	18"W x 30"H x 1.7"D	18"W x 24"H x 1.7"D	24"W x 36"H x 1.7"D	39"W x 27"H x 1.7"D
Mounting Frame/Housing	Aluminum	Aluminum	Aluminum	Aluminum
Wattage	19W	17W	24W	26W
Voltage	24V DC	24V DC	24V DC	24V DC
Current	0.19A	0.17A	0.24A	0.26A
Lumens	2000 LM	1840LM	2640LM	2900LM
Color Temp.	3000K	3000K	3000K	3000K



Product Details Cont.

Part #	694NE2442-30SO00B	690010.121 - 0-10V Dimming 690010.143 - Line Voltage 690010.143-2 - Line Voltage w/ Plug
Dimensions	24"W x 42"H x 1.7"D	13"L x 1.25"W x 1.7"D
Mounting Frame/ Housing	Aluminum	Aluminum
Wattage	26W	Output: 96W Max
Voltage	24V DC	Input: 120 - 277V AC
Current	0.26A	Output: Max 4A
Lumens	2900LM	N/A
Color Temp.	3000K	N/A
Power Factor	N/A	0.94 @ 120V AC
Frequency	N/A	50 - 60Hz




Line Voltage Approved Dimmers

Leviton		Lutron	
VPI06-1LZ	DZ6HD	SCL-153PR	CTCL-153PDH
TTI06-1LZ	6674	DVCL-153PR	PD-6WCL
IPL06	6672	DVWCL-153PH	PD-5NE-WH

Specification Guide

Sample Part #: 694NE1830-30SO00B-AB

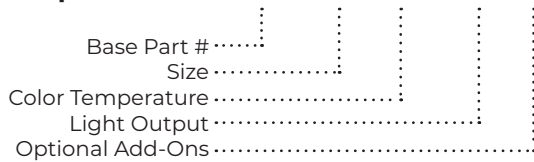

Base Part #	Size	Color Temp.	Light Output	Optional Add-Ons
Standard Stock Mirrors				
694NE	1830 - 18"W x 30"H 1824 - 18"W x 24"H 2436 - 24"W x 36"H 3927 - 39"W x 27"H 2442 - 24"W x 42"H	30 - 3000K	SO00B - Standard Output	N/A
Custom Mirrors				
694NE	1830 - 18"W x 30"H 1824 - 18"W x 24"H 2436 - 24"W x 36"H 3927 - 39"W x 27"H 2442 - 24"W x 42"H 3042 - 30"W x 42"H	30 - 3000K 35 - 3500K 40 - 4000K 00 - Unlit AA - Warm to Cool 3A - 3000K + Amber 3B - 3500K + Amber 4A - 4000K + Amber	SO00B - Standard Output ULO0B - Unlit 01 - 0-10V Power Supply 02 - Line Voltage Power Supply ³	A - Dimming B - Anti-Fog AB - Dimming + Anti-Fog

1. Power Supplies are ordered separately
2. Custom mirrors require MOQ and lead time, contact sales for more info
3. Power supplies will come pre-installed on mirrors with anti-fog mats
4. 270-00228 - Optional 30", 90°, 120V, 3-prong plug

- Notes:**
1. Lumens based on light source
 2. Standard non-stock mirrors subject to 90 day lead time
 3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
 4. Warranty: 10-year frame and structure - 7-year glass, power supply and LEDs

