




Exterior Docking Light

Part#: 69724 & 69725

INSTALLATION INSTRUCTIONS

| PARTS/TOOLS NEEDED: | | |
|---|---|---|
|  |  |  |
| Docking Light | Butt Splice Connectors (Not Provided) | Power Drill |

IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.


- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- It is recommended that fuse protection be added to the positive(+) input.

Bracket Mount:

1. Disassemble light from bracket by removing set screws on side of light
2. Drill a 3/4" hole into mounting surface
3. Feed wire through center hole on mounting bracket, and attach wires to power source (red is positive and black is neutral)
4. Install provided screws through mounting plate into deck and tighten securely
5. Reinstall light to bracket with side set screws


Recessed Mount:

1. Remove bezel if not already disassembled
2. Use 3/4" holes saw spaced 1.75" apart on center. Connect holes to create 2.5" installation cutout
3. Connect wires to power source (red is positive and black is neutral)
4. Feed wires back through the hole and screw the light in place using the screws provided
5. Reattach bezel

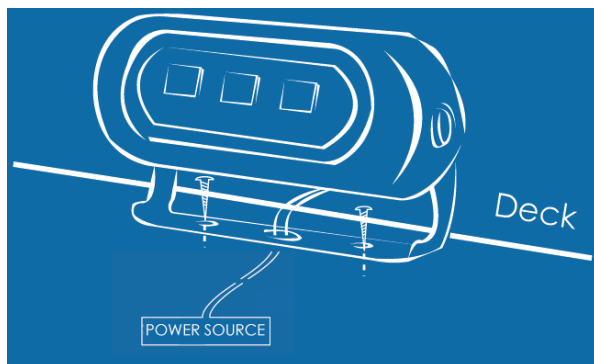

Installation Diagram

[Recess or Shallow Recess Mount]

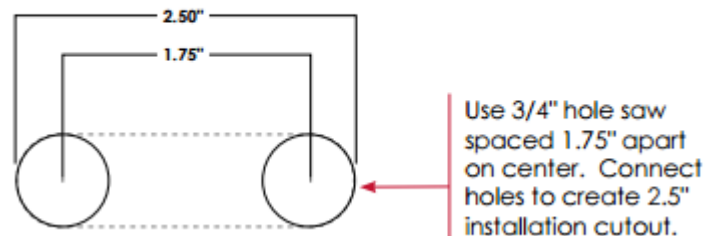

3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
Rev A · 07/20/16