






Beam Courtesy Light

Part#: 69810

INSTALLATION INSTRUCTIONS

PARTS NEEDED:

				
Beam Courtesy Light	1" (24mm) Hole Saw Bit	Butt Splice Connectors (Not Provided)	Power Drill	Phillips Screwdriver


Safety Instructions

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Do not install any luminaire assembly closer than 6" from any combustible materials.
- It is recommended that fuse protection be added to the positive (+) input.


1. Determine the installation location and drill a hole using the provided hole saw bit. Remove the set screw and nut from the back of the light.



2. Pull the units wire through the hole making sure to put the nut on the inside before completing the wiring. Using the wiring diagram below, wire the light to the units power and test the light.

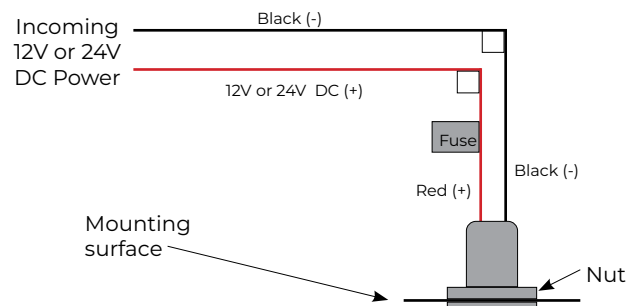

3. Feed the wires back through the hole¹ and tighten the nut² on the back of the light. If possible tighten the set screw³. The set screw is not required for installation but provides added support.

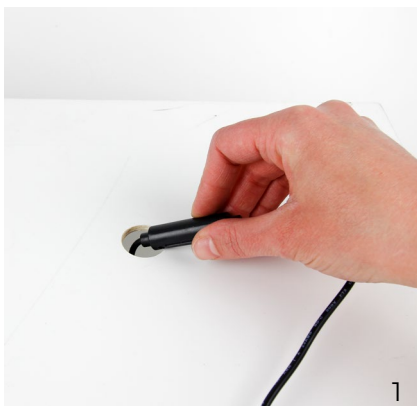

3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
DOC# 710-00023 • Rev B • 12/21/17