






Navi Light

Part#: 69540KK-FF

INSTALLATION INSTRUCTIONS


PARTS / TOOLS NEEDED:

				
Navi Night Light	Mounting Screws (x2)	Power Drill	Jigsaw	Junction Box (not provided)

Safety/Installation Considerations

- Disconnect power before installing, adding or changing any component.
- This light must be installed according to the National Electrical Code and local building codes.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- Installation of this product should be completed by a qualified electrician.
- There are no user-serviceable parts inside. Opening unit will void warranty.

1. Before installing the light determine the desired light level and timing. The red box on the back allows selection of 100% or 50% light output and 1 or 3 minute timing. The timing is how quickly the light will turn off when no movement is sensed. If desired the timing function may be turned off and the light will remain on all the time. For this option, simply turn both timing options to the off position. The photo sensor will still function based on available light conditions.

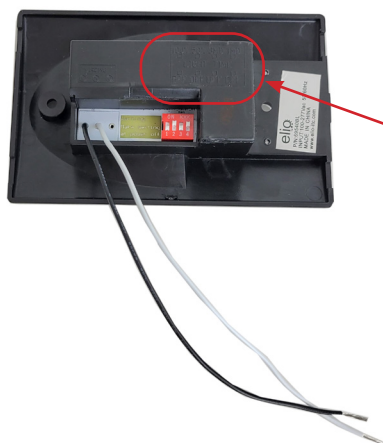

100%	50%	3MD	1MD
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
LIGHT TIME			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
OFF	OFF	OFF	OFF


2. The night light will install in an existing standard 2" x 4" outlet box. Install the junction box according to the manufacturers instructions for either new or existing construction applications.



3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
Rev C · 06/24/22

3. Pull the buildings wiring through the outlet box and attach the black wire (Load (L)) with the black wire on the light. Attach the white wire (Neutral (N)) with the white wire on the light.

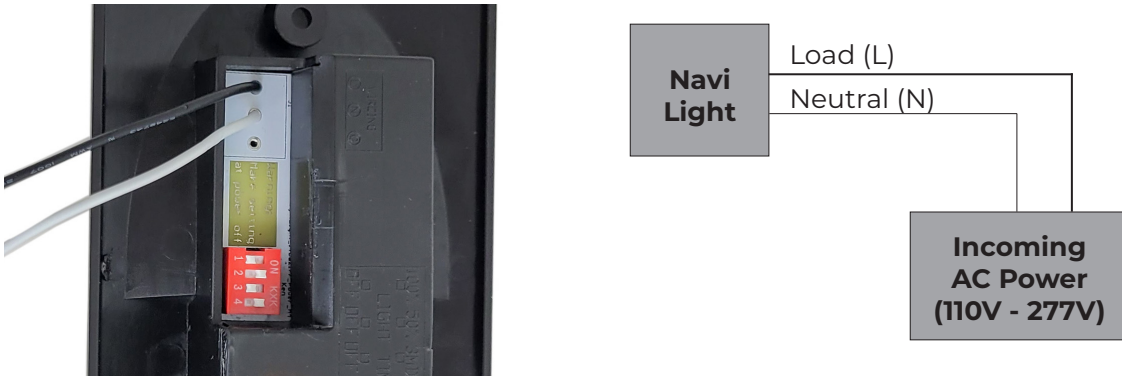

4. Insert the light into the outlet box and attach using the provided screws.



5. Press cover plate onto light until it snaps in place.

