

Luna™ Eclipse Diffused Flex Light



Features


- Gray silicone blends in with darker surfaces for seamless integration
- Diffused material prevents direct view of LEDs
- Standard IP66 rating for damp and wet locations
- Custom length, color, and channel options
- RGB options for ultimate control, allowing multiple color selection

Product Details

	Single Color	RGB
Housing Material	Gray Diffused Silicone	
Voltage	10-14V DC	
Wattage	2.3W/Ft	4.3W/Ft
Current	0.2A/Ft	0.3A/Ft
Lumens	60LM/Ft @ 3000K	20LM/Ft @ RGB White
Color Temp.	3000K, 6300K, Blue, Amber or Red	RGB
Wire Gauge	18AWG	22AWG
IP Rating	IP66	
UV Stable	Yes	
Listing	UL	

Specification Guide



Sample Part #: RNLL1206-20012-10-DL

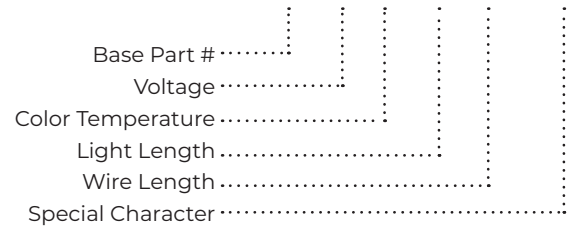

Base Part #	Voltage	Color Temp.	Light Length	Wire Length	Special Character
RNLL	12 - 12V	30 - 3000K 63 - 6300K BL - Blue AM - Amber 02 - Amber/White 03 - Blue/White 04 - Red/White 05 - Red/Blue 07 - Red/Amber 06 - RGB	200 - 200"	12 - 12"	DL - Gray Silicone

Note: Light cannot be field cut, contact sales for information on custom lengths



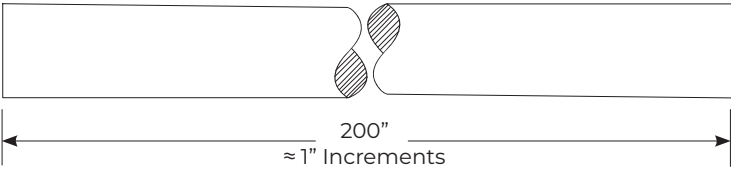

Accessory Specification

Description	Part #
Aluminum Screw Mount	RNLL-1-72
Aluminum Adhesive Mount	RNLL-1T-72
Aluminum 45° Screw Mount	RNLL-2-72-CL
Aluminum 45° Adhesive Mount	RNLL-2T-72
Black Plastic Screw Mount	RBLL-2
Black Plastic Adhesive Mount	RBLL-1
White Plastic Screw Mount	RBLL10-KS
White Plastic Adhesive Mount	RBLL10-KT



White Plastic



Black Plastic



Aluminum

