


Preimuim USB Charger

Part#: USB-AA-BLFF

INSTALLATION INSTRUCTIONS

PARTS/TOOLS NEEDED:

		
USB Charger	Butt Splice Connectors (Not Provided)	Power Drill


IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- It is recommended that fuse protection be added to the positive(+) input.
- Technical Specs:
Voltage: 10-14V DC | Input Current: 2A | Output Current: 2.4A/Port

1. Determine the installation location and drill a 1½" hole.



2. Using the wiring diagram below, wire the charger to the incoming 12V DC power. Test the charger.

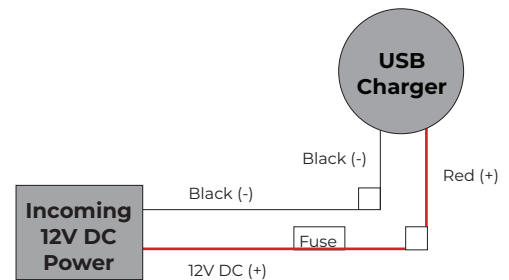

3. Feed the wires back through the hole and push the charger into the mounting surface. Tighten the nut on the back to hold in place.



3030 Corporate Grove Dr.
Hudsonville, MI 49426
Phone: 616.396.1355
itc-us.com

For warranty information please visit www.itc-us.com/warranty-return-policy
DOC #: 710-00191 · Rev B · 11/23/21