VersiControl RGB Control Pad


INSTALLATION INSTRUCTIONS

Part#: 21055 or 21057

PARTS / TOOLS NEEDED: VersiControl RGB 4-Zone or 2-Zone Smart Pad RGB Lighting (Varies) Mounting Screws x 2 2" Hole Saw Bit (not provided) Power Drill


Safety Instructions

- $\boldsymbol{\cdot}$ Disconnect power before installing, adding or changing any component.
- · To avoid a hazard to children, account for all parts and destroy all packing materials.
- · Do not install any luminaire assembly closer than 6" from any combustible materials.
- · Positive (+) inputs require a fuse if the attached wire leads are not rated to handle the max current.
- 1. INSTALL 21055 CONTROL PAD: Determine the installation location of your control pad. Note the control module comes with a 7" long cord so the control pad will need to be located near the module. Drill a 2" hole and insert the control pad. Install the mounting bracket using the two M2x8mm stainless steel #10 torx head screws provided. Do not fully torque screws until both have been partially installed.










INSTALL 21057 CONTROL PAD: Determine the installation location of your control pad. Note the control module comes with a 7" long cord so the control pad will need to be located near the module. Drill a 2.125" hole and insert the control pad. Note, this version will only work with a 1/8" thick mounting surface.







2. CONNECT CONTROL PAD: Insert the connector on the control pad into the connector on the module.




*Mating connector Deutsch DTM06-6S





3. OPERATION: Below is the keypad overview, for more detailed operational instructions, review your owners manual or visit http://www.itc-marine.com/product-category/lighting/versicolor-rgb/

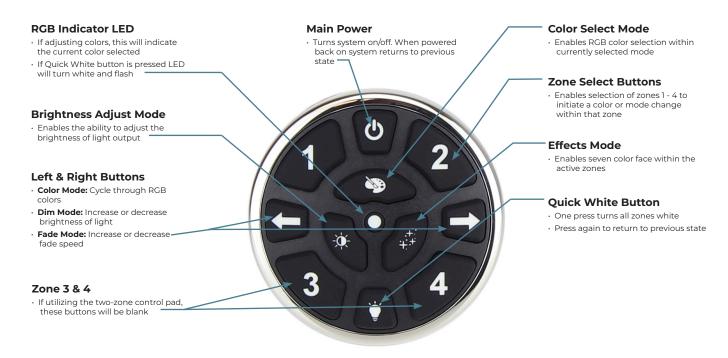

Note: To reset the Bluetooth passcode and clear lock zones, press and release both arrow keys at the same time.

