

# Closet Light

Part#: TPR08-72 & TPR12KK-LLLWL-8

## INSTALLATION INSTRUCTIONS

### PARTS/TOOLS NEEDED:

				
Closet Light Channel	TPR Tape Light	#4 Mounting Screws (optional)	Power Drill or Staple Gun (Not Provided)	Butt Splice Connectors (Not Provided)

### IMPORTANT SAFETY INSTRUCTIONS. READ CAREFULLY FOR YOUR PROTECTION AND SAVE ALL INSTRUCTIONS.

- Disconnect power before installing, adding or changing any component.
- To avoid a hazard to children, account for all parts and destroy all packing materials.
- It is recommended that fuse protection be added to the positive (+) input.


1. Determine the installation location and staple or screw channel in place. If screwing the channel in place, pre-drill holes to prevent the channel from cracking or warping




2. Press the tape light into the channel making sure not to pinch or sharply bend the light. If additional securement is needed, the paper backing can be removed from the light and it can be taped into the channel.




3. Follow the wiring diagram below.

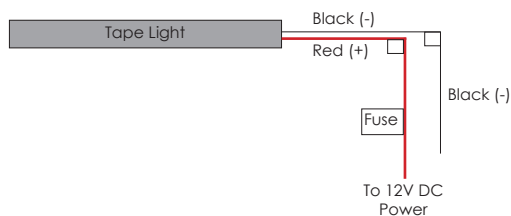


6. Please review the considerations below to ensure a successful installation.  
\*Flexible light can't be cut in the field. Field cutting the light will void the warranty.



Do not horizontal bend to a radius of less than 11.8"

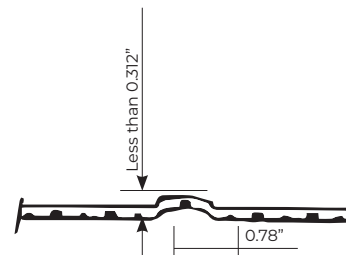


Do not axial bend to the height of more than 0.312" within 0.78" segment




Do not bend to a radius of less than 1/2"




Do not twist more than 90° over the length of one 24V segment / Two 12V segments (4" total length)



Do not bend flexible light at 90°



Do not bend right at solder joint



Only bend the wire



3030 Corporate Grove Dr.  
Hudsonville, MI 49426  
Phone: 616.396.1355  
[itc-us.com](http://itc-us.com)

For warranty information please visit [www.itc-us.com/warranty-return-policy](http://www.itc-us.com/warranty-return-policy)  
DOC #: 710-00184 · Rev B · 11/10/2022