

Elara™ Clear Sealed Flexible LED Light



Features


- RGB(W) and addressable options provide endless possibilities and color control allowing for multiple colors to be on at the same time
- RGB/addressable options work with ITC's VersiControl smart system and phone app
- IP66 rating allows for installation in exterior or wet locations
- Flexibility allows for installation in curved and straight mount applications
- Easy to install channel with staples, screws, or adhesive backing tape
- Addressable uses a three wire system with the standard positive/negative and an additional data line

Product Details

	Single	RGB	RGBW
Voltage	10-14V DC		
Wattage	2 W/Ft	Std: 1.4 W/Ft High: 3 W/Ft Address: 2.8 W/Ft	3.6 W/Ft
Current	0.12 A/Ft	Std: 0.1 A/Ft High: 0.2 A/Ft Address: 0.2A/Ft	0.27 A/Ft
Lumens	90 LM/Ft	Std: 46 LM/Ft High: 82 LM/Ft Address: 105 LM/Ft	140 LM/Ft
Color Temp.	3000K, 6300K, Blue or Red	RGB	RGBW
IP Rating	IP66		
UV Stable	Yes		
Wire Gauge	18 AWG	22 AWG Address: 18 AWG	24 AWG

Specification Guide


Sample Part #: RBLL1263-67012-12-A

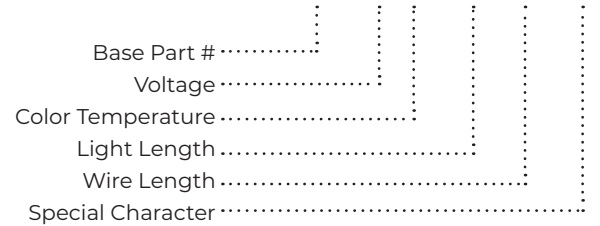

Base Part #	Voltage	Color Temp.	Light Length	Wire Length	Special Character
RBLL	12 - 12V	30 - 3000K 63 - 6300K BL - Blue RD - Red 06 - RGB RW - RGBW AR - Addressable	670 - 264" (22') 761 - 300" (25)*	12 - 12"	A - Single Color 12-A - RGB/RGBW 12 - Addressable

Note: Light cannot be field cut, contact sales for information on custom lengths

* Addressable version only. Lengths greater than 20' will be powered from both ends

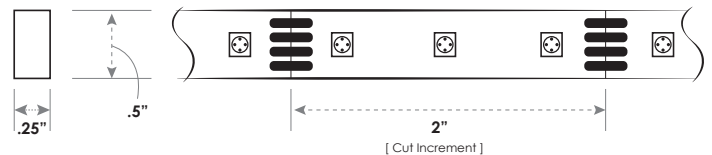

Accessory Specification

Description	Part #
10MM Single Color Channel	
Black Plastic Adhesive Mount	RBLL-1
Black Plastic Screw Mount	RBLL-2
White Plastic Adhesive Mount	RBLL10-KT
White Plastic Screw Mount	RBLL10-KS
12MM RGB/RGBW Channel	
Black Plastic Screw Mount	RBLL12-LS
Black Plastic Adhesive Mount	RBLL12-LT
KS - White Plastic Screw Mount	RBLL12-KS
KT - White Plastic Adhesive Mount	RBLL12-KT
3S - Aluminum Screw Mount	RBLL12-3S
7T - Aluminum Adhesive Mount	RBLL12-7T



White Plastic



Black Plastic



Aluminum

